



Pre-Planning Delivery Guide



Need Assistance? Call 1-888-768-6772

Pre-Delivery

Spa Delivery Preparation

Your spa delivery will arrive CURBSIDE at the specified delivery address you provided at the time of your purchase. You will need to make prior arrangements for assistance in moving your spa into your desired spa location.

If your spa location will be more than 10 feet from an existing electrical outlet that is ready and dedicated for spa use, you may also need to hire a professional electrician to establish those electrical connections. Most cities and counties require permits for exterior construction and electrical circuits. Be aware of your local codes and laws.

Some areas have codes requiring barriers such as fencing and/or self-closing gates on property to prevent unsupervised access to the property by children. Your local code enforcement department can provide information on which permits may be required and how to obtain them before delivery of your spa.

Important after you place your order:

Please read and sign the **AquaRest Curbside Delivery Instructions and Agreement**. Please fax to 407-936-9696 or email to Sales@AquaRestSpas.com as instructed so we can ensure a smooth delivery and have you on your way to enjoying your spa as soon as possible.

Example of the AquaRest Curbside Delivery Instructions and Agreement located at our website, AquaRestSpas.com/Owners



Curbside Delivery Instructions & Agreement

Need Assistance? Call 1-888-768-6772

Please read instructions carefully to experience a smooth spa delivery.

Please read AquaRest Spas Pre-Delivery Guide for details on site preparation for your new spa. All listed requirements must be met prior to delivery of your spa.

- If you purchased the 240V version electrical hookup, electrical work must be done by a licensed, certified electrician.
- Your street must be clear from all debris and must be able to accommodate a truck (up to 65' long). If this is an issue, please contact us at least 48 hours before delivery.
- Delivery will be made CURBSIDE at the end of your driveway. NO EXCEPTIONS.
- Extraordinary curbside delivery requirements may prevent delivery or may require extra fees, payable by buyer to the retailer's carrier. Any extraordinary delivery requirements need to be pre-arranged prior to delivery.
- Delivery will be Monday - Friday, 8 a.m. - 5 p.m. and cannot be delivered without a signature.
- All required city/subdivision permits are the responsibility of the spa owner.
- Spa unpackaging is the responsibility of the BUYER. Spa must be inspected before delivery agent departs.
- If damage is noticed, note the damage on the freight bill and call AquaRest Spas at **1-888-768-6772**.
- This agreement must be signed, dated and sent 72 hours before delivery, either via fax to **407-936-9696** or via email to **Sales@AquaRestSpas.com**.

NOTE: Spa delivery will be attempted based on the information you provide. If delivery is not possible on the first attempt due to poor accessibility or missed appointments, your spa order may be canceled. To ensure a successful delivery and your overall satisfaction, please sign and return this document.

RETURNS: All product returns must be sent back in original manufacturer's packaging and crating materials including the original invoice, placed on a pallet and put curbside for pickup. Electrical disconnect charges are the responsibility of the buyer. Refunds are not processed until hot tub is successfully picked up by carrier. If original schedule pickup is not possible due to buyer's failure to meet outlined return requirements, additional fees may be assessed to the buyer.

Buyer acknowledges receipt of the above delivery instructions and agrees with the conditions listed above.

Signature _____ Date _____

Pre-Delivery

Spa Location Checklist (more details on following pages):

- Is permitting required for construction, electrical or barriers?
- Is the support surface adequate to support the weight of the spa?
- Is the support surface adequate to handle water overflow?
- Are there considerations for limiting access by children?
- Are there overhead electrical lines?
- Will the electrical cord reach an outlet?
- Is the electrical outlet dedicated for the spa use only?
- Is there adequate room to access the service door, drain and filter?
- Are there any privacy considerations?
- Do you have adequate space for the cover when the spa is in use?

Site Selection

Before proceeding, please read the 'Important Safety Instructions' at the beginning of the owner's manual, available on our website, AquaRestSpas.com/Owners.

1. Electrical Connection. Installing your new Dream Maker Spa couldn't be simpler. After filling your spa, just plug it in to any **standard 120v / 15 amp outlet** for power.* Do not use an extension cord. If you prefer, our models can be hardwired by a certified electrician.

*To avoid nuisance circuit breaker tripping, it is best to use an outlet on a circuit which does not supply power to any other major running appliance. This can be checked by turning off the circuit breaker that supplies the intended outlet and verifying that no other electrical devices no longer work, such as a refrigerator, dishwasher, washing machine, coffee maker, hair dryer, etc.

2. No Overhead Power Lines. Do not locate your spa under overhead power lines or in proximity to existing buried or exposed electrical circuits. See your electrician.


3. Childproof Your Spa. Plan for limiting access of children. Precautions such as self-closing and locking gates or access doors, fencing and other child barriers, as dictated by the site.

4. UL Safety Cover Required. In addition to its insulating factors, a good cover also provides a measure of additional protection from unwanted access. Your AquaRest cover is classified by the Underwriters Laboratories meeting ASTM F1346-91 requirements.

Site Selection

Provide a solid load-bearing site:

CAUTION: Your spa must be installed on a level, flat, solid load-bearing surface. Do not locate the spa on a surface that can be damaged or altered by water.

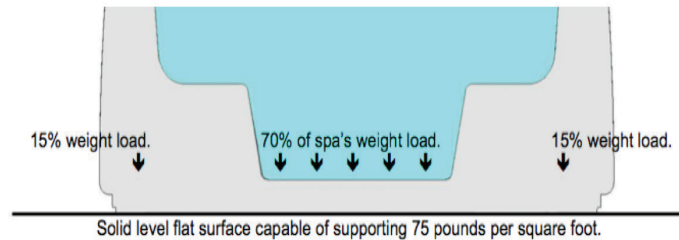


- The site must provide a solid foundation with a minimum load bearing capacity of 117 pounds per square foot (572 kgs per square meter).
- Concrete slabs and decks must be designed to support this weight. Do not select a site composed of individual unsupported bricks, blocks, grass or other materials which will shift unevenly and cause damage to your spa's internal frame.
- Provide a level, flat site: A level site is critical to both the performance and enjoyment of your spa. A flat and level site provides the surface necessary to properly dispense weight between the footwell (which bears most of the spa's weight) and the structural frame (which primarily provides stabilization and secondary support).


Surface Suggestions:



Travertine




Brick Pavers



Synthetic Wood



Cement



Stone/Slate



Stained Cement

Electrical Requirements for 120V 15AMP

- **Locate your spa so that the GFCI plug and cord will reach a dedicated 120V outlet, but not closer than 5 feet (1.5 meters).** A dedicated outlet is one that does not have other electrical devices operating on the same circuit. This can be checked by turning off the circuit breaker that supplies the intended outlet and verifying that no other electrical devices no longer work, such as a refrigerator, dishwasher, washing machine, coffee maker, hair dryer, etc.
- **Do not use an extension cord.** See owners manual for directions on extending cord.
- **Do not connect to the outlet until the spa is filled with water.**

Note the deluxe upgrade package consists of a Factory Installed:120/240V, 1 kw/4kw heater, 2 speed pump and an ozone generator. The Spa ships Plug and Play ready for 120-Volt 15 Amp with a 1kW heater. The heater can be converted from a 120-Volt 1kW to 240-Volt 4kW with the installation of a 30 or 50 Amp 240-Volt electrical service, by a certified electrician.



Find GFCI power plug located below the right corner of the equipment access door and cut the white tie.




Pull GFCI along with power cord and inspect the full length of the cord for any damage before each use. If cord gets tangled, remove equipment access door (see next picture).



Remove and save access panel screws. Use caution when reinstalling the screws. Do not over-tighten.

Electrical Requirements for 240V*

- **240V electrical connections must be completed by a Certified Licensed Electrician. A GFCI AND A DISCONNECT SWITCH ARE REQUIRED:** The National Electrical Code requires that spas connected to 240V circuits be equipped with a GFCI and Disconnect Switch. See National Electrical Code Articles 680-12 and 680-42.
- **ISOLATED, DEDICATED 240V, 30 OR 50 AMP CIRCUITS ARE REQUIRED.**
- All 240V operations wiring must be permanently hardwired, installed in grounded conduit and installed in compliance with the National Electrical Code and all local codes.
- **WARNING: USE COPPER CONDUCTORS ONLY!**

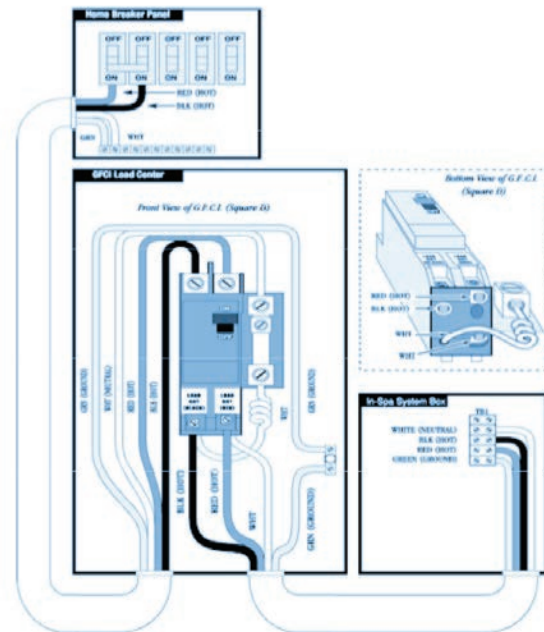

Congratulations!

You are now ready to start Living the Spa Life.

Welcome to the AquaRest Family!

Customer Service is here to serve you and ensure the best possible experience.
If you have any questions about preparing for your new AquaRest Spa, please call us!

1-888-768-6772

