ASSEMBLY INSTRUCTIONS

(For LD1031C-46*86)


ATTENTION:

- 1. Please read these instructions carefully before assembly.
- 2. Aluminum is soft metal over tighten may strip threads or break the part.
- 3. DO NOT use power tools.
- 4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Assembly steps:

- 1. Turn the table top(A) upside down on the soft clean surface. Loosely attach the legs(C) to the table Top with bolts(D), big flat washers(E), big lock washers(F) nuts(G) and nut caps(H) using the wrench(N). Tighten the bolts at this time.
- 2.Loosely attach the center ring(B) to the legs (C) with small flat washers(J), small lock washers(K), screws(I) and PVC covers(L) using the wrench (M).
- 3. Tighten all the bolts and nuts completely. DO NOT over-tighten.
- 4. Turn the table onto its legs. Use the adjuster feet to level the table.

Warning: DO NOT use acid or alkaline washing liquid to clean the product.

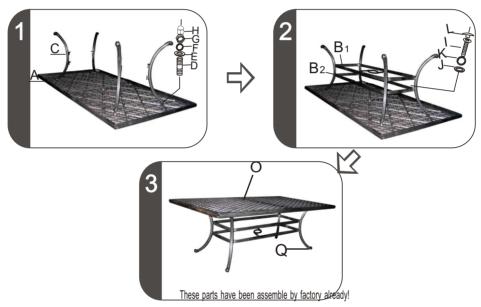

| Parts list | Parts picture | Description | Qty | Parts list | Parts picture | Description | Qty |
|----------------|--|----------------|-----|------------|---------------|-------------------|-----|
| Α | The state of the s | Table top | 1 | D | (M8*30) | Bolt | 4 |
| <u> </u> | | | | E | (M8) | Big flat washer | 4 |
| B ₁ | | Center ring | 1 | F | (M8) | Big lock washer | 4 |
| | | | | G | (M8) | Nut | 4 |
| B ₂ | | Center ring | 1 | Н | Œ | Nut cap | 4 |
| | | | | I | (M6*35) | Screw | 8 |
| С | | Table leg | 4 | J | (M6) | Small flat washer | 8 |
| | | | | K | (M6) | Small lock washer | 8 |
| Q | | Foot leveler | 4 | L | | PVC cover | 8 |
| 0 | | Umbrella cover | 1 | М | | Wrench | 1 |
| | | | | N | 23 | Wrench | 1 |

Made in China

*** DO NOT OVER TIGHTEN**

***NO POWER TOOLS**

***NO SOCKET DRIVERS**





ASSEMBLY INSTRUCTIONS

(For LD8176-11)

| Parts List | | | | | | | | | | |
|------------|---------|---------|------------------|-------------|--|--|--|--|--|--|
| Pieces | Schema | | Description | QTY | Remark | | | | | |
| Α | (M8*35) | | Screw | 2 | | | | | | |
| В | (M8) | | Flat washer | 2 2 2 | Hard ware pack | | | | | |
| С | (M8) | | Lock washer | 2 | | | | | | |
| D | (M8) | | Nut | | | | | | | |
| E | (M8) | | Nut cap | 2 | | | | | | |
| F | ı | 23 | Wrench | 1 | | | | | | |
| | 1 | 4 | Seat | 1 | | | | | | |
| | 2 | | Single alu plate | 2 | These parts have been assemble by factory already. | | | | | |
| | 3 | | Alu plate | 2 | | | | | | |
| | 4 | | Spring plate | 2 | | | | | | |
| | 5 | (M8*35) | Screw | 4 | | | | | | |
| | 6 | (M8*45) | Screw | 4 | | | | | | |
| | 7 | (M8) | Flat washer | 8 | | | | | | |
| G | 8 | (M8) | Lock washer | 8 | | | | | | |
| G | 9 | (M8) | Nut | 8 | aneauy. | | | | | |
| | 10 (M8) | | Nut cap | 8 | | | | | | |
| | 11 | (M6*20) | Screw | 2 | | | | | | |
| | 12 | (M6) | Flat washer | 2 | | | | | | |
| | 13 | (M6) | Lock washer | 2 | | | | | | |
| | 14 | | TR Parts | 1 | | | | | | |
| Н | 1 💍 | | Base | 1 | | | | | | |
| | 2 | | Oil cap | 1 | | | | | | |
| I | • | | Foot leveler | 6 | | | | | | |
| J | | | Seat Cushion | 1 | | | | | | |




WARNING!

- O This chair has a 275 lbs weight capacity.
- O Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.

ATTENTION:

- 1. Please read these instructions carefully before assembly.
- 2. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 3. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

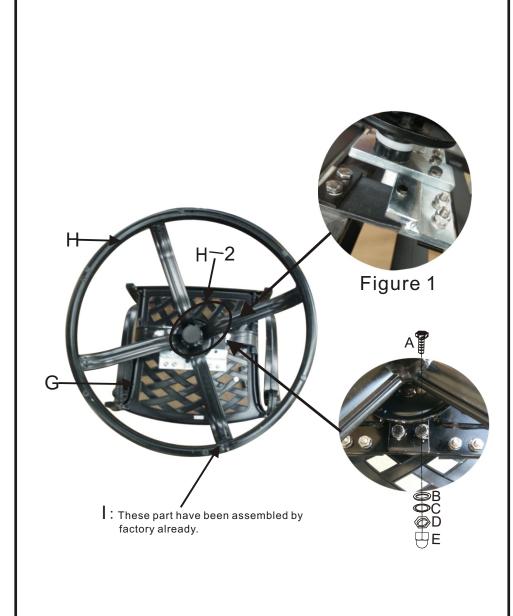

- Before removing all protective packing material and position base on floor. Attach the base(H) onto the seat (G) using bolt(A), flat washers(B), lock washers(C), nuts(D) and nut cap(E). Be sure to the arrows face to front.
- 2. Tighten all the bolts and nuts. Test the swivel rocker gently. If the rocker does not rock properly, double check the assembly procedure.
- 3. Remove all protective packaging.
- 4. If the back rocking mechanism is too tight, you can loosen it by removing the adjusting block(G14) on the bottom of the TR. Please make sure proper assembly is done after adjusting the tightness. See figure 1
- 5. Put Cushion(J) on the unit(as shown in the picture)

Warning DO NOT use acid or alkaline washing liquid to clean the product.

